

SSM-500-35A/B



Supplier/wholesaler/manufacturer of 20"(526mm) 35T diamond cutting blades/saw blades /circular blades for road

Min Order Quantity: 500 Pieces
Supply Ability: 300,000 Pieces per month
Payment Terms: T/T,,L/C,
Price: To be negotiated

 Send email to us

 Download To PDF

Product Detail



Product Tags

Net Weight(g)	4.4kg
Numbers of Teeth	35T
Teeth Height	18mm
Blade Diameter	20"(526mm)
Disc Bore Size	2"(50mm)
Blade Thickness	3.6-3.8mm
MAX.RPM	1450
Cutting Condition	Wet

This product adopts the 500mm VOV teeth, which is independently developed by our engineers and patented by [State Intellectual Property Office of the People's Republic of China](#).

The segment is designed in the shape of letter V and O, we call it VOV teeth.

Unique segment design can improve and maximize the cutting efficiency, its contact area with the cutting object is smaller, the heat dissipation performance is better and reduces the friction. In the same condition, our products are sharper and faster than general saw blades.

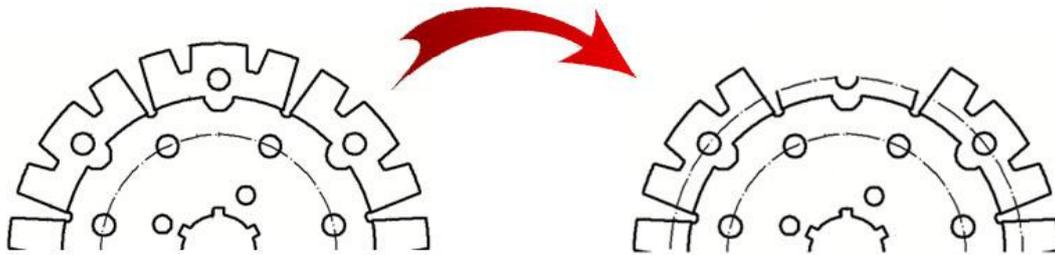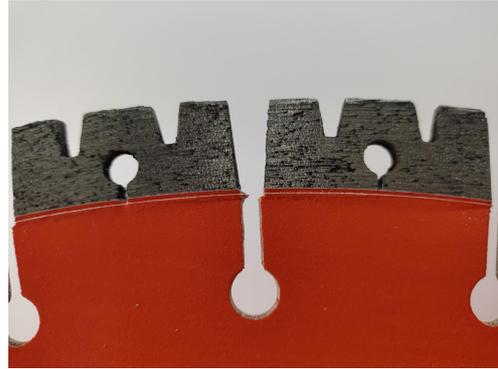

When the two V teeth wear to a certain extent, the reserved circle O will also be worn, so as to form a new VOV teeth, ensuring the cutting speed and efficiency while increasing the product durability. See the diagram for details.

Products Service

We have 30 years of production experience in diamond cutting blades, so we can ensure the high-quality of our products. Then we can provide OEM or ODM services, according to your specific requirements to supply the products for you. If you have any problems when using our products, please contact us directly, and we will answer them for you online.

Technical Service

Our engineers would like to communicate with you about the technical problems, you are welcomed to raise any questions about our products, we will share with you without reservation. Please contact our engineering team if you need any help.

Sales Service

Whenever we meet our clients, we are always enthusiastic. With a serious and responsible working attitude, we help our customers to solve problems, so that they can avoid troubles and save effort in the procurement process. From the initial quotation to the final customs clearance, we attach great importance to every link to ensure the transaction goes smoothly. Besides, our professional sales team will help our customers to save their time. We are sure that's the main reason why you choose us.

Percentage of raw materials :

- Carbon structural steel matrix
- 65 Mn hardened steel matrix
- High grade diamond
- High and higher quality
- Homemade alloy powder.

Application:

- Road cutting pieces,
- pebble stone
- granite stone road
- limestone stone road
- concrete road,
- asphalt road

Tool Compatibility

- Road cutter
- Bench cutting machine

Using machine



Safety and working instr

- When selecting the cutting blade, the processing material suitable for the cutting blade should be made clear.
- The dirt attached to the cutting blade and flange should be removed before installation and use, and the marked direction should be consistent with the steering of power tools during installation.
- Be careful not to use cutting blades that are compressed or deformed by impact.
- Operators should wear safety helmets, safety shoes, protective glasses and protective gloves when using cutting blade. Ear plugs should also be used as needed.
- Power tools should have shields.
- Before you operate, you should make sure that there is no one else around.
- After the cutting blade is in full operation, the cutting operation should be carried out, slowly cut first, and then normally cut
- after being smooth. Excessive force or curve cutting is strictly prohibited.
- When cutting, do not stop the operation of the cutting blade.
- Do not touch the rotating cutting blade with your hands.
- Turn off the power tool and unplug the power plug from the socket before replacing the cutting blade.

Quality Assurance

- Any product quality problems of the company shall be returned.
- The blades with the following problems will not be returned:
 1. Insufficient water addition causes burns and deformation of the substrate, and the cutter burns black and has pits, or causes the cutter to fall.
 2. Improper installation or problems with the machine cause the cutting blade to be unbalanced, resulting in wear of the substrate or grooves in the joint between the cutter and the substrate, and the cutter may fall off.
 3. The wear height of the cutter exceeds 1/3.
 4. There is a problem with the machine that causes the blades to wear out, or the outer diameter of the blades is not round after cutting
 5. Excessive cutting or strong cutting can cause the substrate to wear out or the cutter to fall or other human factors damage.

FAQ

Q:Are samples available for quality test?

A: Yes, free samples can be prepared for quality test,and we bear the freight charges.

Q: Do you accept OEM/ODM?

A: Yes,OEM/ODM is accepted.We can also design label for you for free.

Q: Do you have any certificate?

A: Yes, we have MPA,ISO certificates .

Q:How could you ensure the quality?

A:Only high quality and stable batch products can ensure user's safety and consistent effect.To ensure this, all our products will pass the semi-product testing, finished- product testing and inspection before delivering.Quality passes only after 3 times testing.